

IBOX-702

Intel® Celeron® J1900 Quad Core Processor Fanless Industrial PC



Features:


- ◇ All aluminum structure, fanless design;
- ◇ Support Intel Celeron J1900 quad core processor ;
- ◇ Onboard DDR3 4GB RAM;
- ◇ 1*MSATA Slot, 1*2.5" HDD;
- ◇ Support 3*Mini PCIE Slot;
- ◇ 10*COM (2*COM RS232/422/485 Optional) ;
- ◇ Support DC 9~36V wide voltage Input, Support positive pole and negative electrode connect reversely protection;
- ◇ Support OS:



Specification

Model	IBOX-702
Color	Black (Color can be customized)
Material	High-quality all aluminum, surface anodic oxidation
Processor	Onboard Intel Celeron J1900 (Quad core quad threading, 1.99G, TDP: 10W)
RAM	Onboard DDR3L 1333 4GB RAM
BIOS	AMI UEFI BIOS
Display Chip	Integrated Intel HD Graphics
Front Port	1*VGA, 1*HDMI
Rear I/O	4*USB2.0, 1*RESET, 10*LED, 1*4Pin Phoenix Connector, 1*Power Switch
Rear I/O	1*USB3.0, 1*USB2.0, 6*COM (COM1, COM2 RS232/422/485 Optional) , 1*Speaker 2*Intel 1000M LAN, 1*VGA, 1*HDMI, 1*2PIN Power Supply Phoenix Connector
Expansion Slot	Support 1*MINI PCIE Slot (WIFI/Bluetooth Optional) ; Support 1*MINI PCIE Slot (WIFI/Bluetooth/3G/4G Optional) , Embedded SIM Slot ; Support 1*MINI PCIE Slot (Support MSATA) ; Optional Ports : GPIO, MIC, LPT, 10*COM, PS/2, 2*USB2.0 (Standard version doesn't have these ports)
Network	2*Intel 82583V/i211-AT 10/100/1000M LAN
Storage	Support 1*MSATA Slot, 1*2.5" HDD
Input Voltage	Support DC 9~36V wide voltage Input, support positive pole and negative electrode connect reversely protection
Other Function	Auto power on when there is electricity, Timing boot, Wake on LAN, PXE boot, Watchdog (0~255 level) (Standard version doesn't set these function)
Work Temp	0°C ~ +50°C (Commercial HDD) , -20°C ~ +60°C (Industrial SSD) , Surface air flow
Work Humidity	5% ~ 95% non-condensing
Certificates	CE、CCC、 FCC Class A、 ROHS
Dimension	IBOX-702 A (1*COM) : 234 * 175 * 50mm IBOX-702 B (6*COM) : 234 * 175 * 64.5mm IBOX-702 C (10*COM) : 234 * 175 * 64.5mm
Net Weight	2.0 kg
Application	Industrial Automation, Medical, Logistics Transportation, Warehouse, Electronic Education etc.

IBOX-702 B/C Drawing

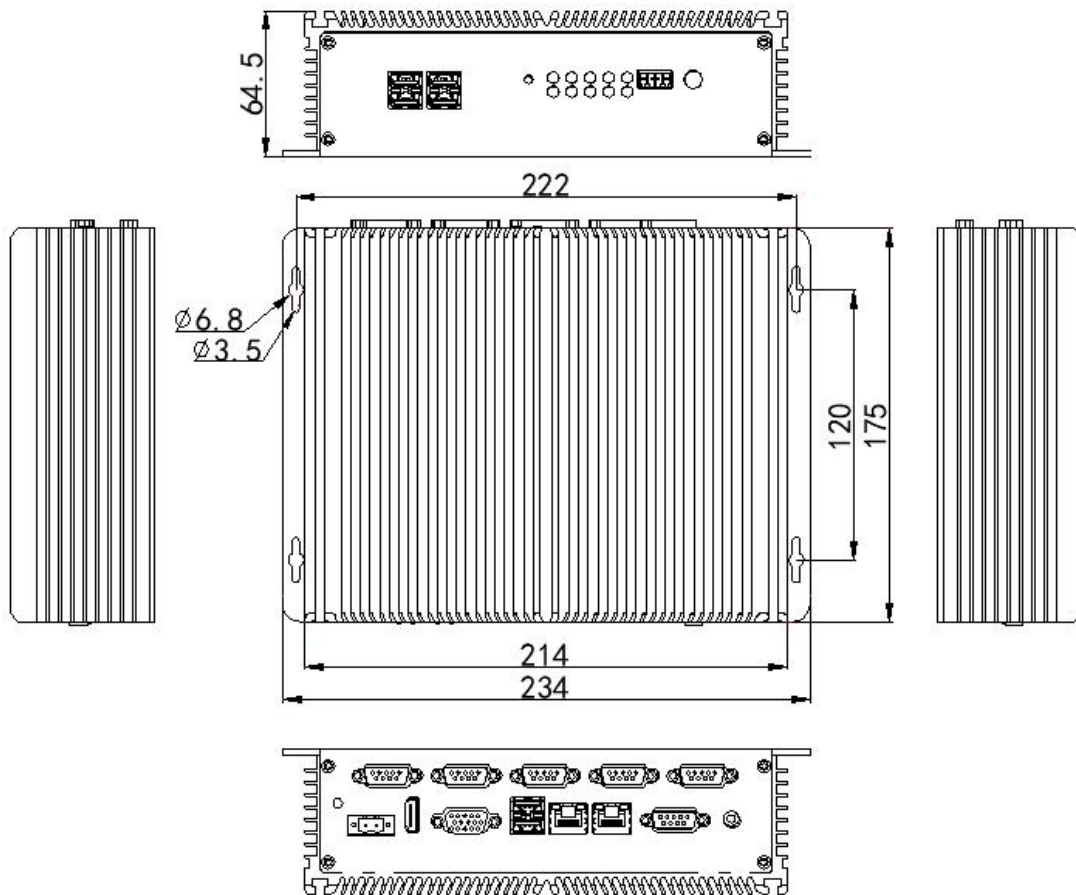

Accessories List

Name	Quantity	Specification
Power Adapter	1	12V 5A
Power Cord	1	Any Plug Optional (China, US, EU, UK etc.)
CD Driver	1	Neutral

Order Information

Configuration 1	IBOX-702 A			Standard Port, 1*COM
Configuration 2	IBOX-702 B	Intel Celeron J1900	Onboard 4G RAM	Standard Port, 6*COM
Configuration 3	IBOX-702 C			Standard Port, 10*COM